

Collision Avoidance & Warning Light System

CAA

A Member of the Track System Family of Products

**Have confidence in your
multi-camera set-up**



Features:

» **Laser Scanning Obstacle Detection**

» **Universal Connectivity**

Compatible with TG3 and TG4 track system

» **Operation of Device:**

- Light goes solid on when EP6 or TG4 is in motion.
- Light blinks if there is obstruction in TG4 path.
- Knob on light adjusts brightness.
- 2D scanners can be configured up to 5 meters (16.4 feet).

Collision Avoidance & Warning Light System


CAA

A Member of the Track System Family of Products


Specifications	
Light Source	LASER class 1 (IEC60825-1:2007) 905nm
Environmental	Indoor
Temperature Range	Operating: 4 to 50°C (40 to 120°F) Storage: -30 to + 60°C (-22 to 140°F)
Power	12V to 24Vdc - Internal from the Pan Tilt Auxiliary Cable
CAA Dimensions	Adjustable 27 inches, Vertical - Horizontal - Total
WSU Dimensions	6.50 L x 1.23 D x 2.57 H (inches)
MWL Dimensions	2.25 L x 2.75 D x 3.0 H (inches)

Specifications and features subject to change without notice


Ordering Information	
MODEL NUMBER	DESCRIPTION
CAA	Collision Avoidance Armv
WSU	Warning Support Unit
MWL	Motion Warning Light
CA-WSU-LIM1OUT	Cable Limit 1 out to TG4 CTL Box
CA-WSU-LIM2OUT	Cable Limit 2 Out to TG3 CTL Box
CA-VSI-XYZ-ENC	Cable VSI XYZ Encoder
CA-S2-AUX	Cable S2 Aux PWR/Data
CA-WSU-XYZVR	Cable WSU to Pan Tilt
CA-BT-ENC	Cable BT VS Encoder
CA-WSU-MWL	Cable WSU to Motion/Warning Light
CA-WSU-UST05	Cable EXTR WSU to UST-05
CA-WSU-LIM1IN	Cable Limit Switch 1 in. to WSU
CA-WSU-LIM2IN	Cable Limit Switch 2 in. to WSU

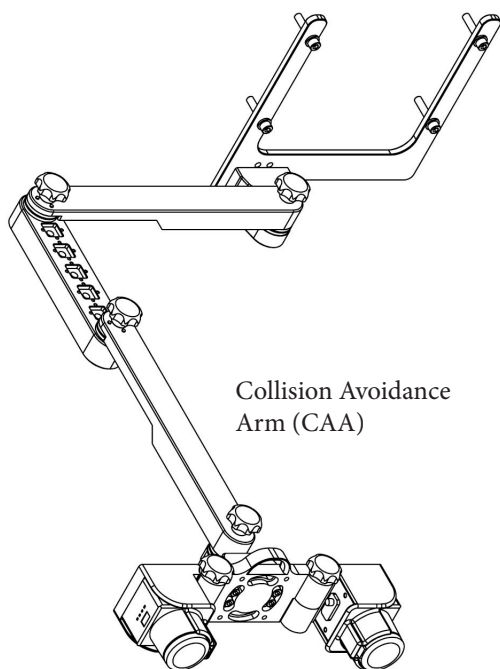

Collision Avoidance
Arm (CAA)

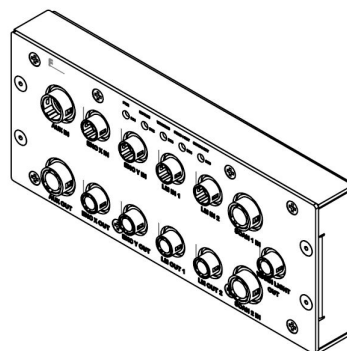

Warning Support
Unit (WSU)



Motion Warning Light
(MWL)

Collision Avoidance & Warning Light System

CAA

A Member of the Track System Family of Products

